



# Ultrasonic Level Transmitter



## **NIVOSON MLU 860**

### **Features**

- 2 Wire Loop Powered
- Narrow Beam Angle of only 5 deg
- Built-in Temperature Compensation
- Level, Volume and Flow Measurement
- Optional Integrated Display
- 32 bit linearization function





# Ultrasonic Level Transmitter

The Ultrasonic Level Transmitter offers non-contact measurement of level of liquids stored in tanks. As the instrument does not come in contact with the liquid, it is not affected by the chemical properties of the same such as corrosiveness and aggressiveness. In addition to level measurement, the instrument also offers distance, volume and open channel flow measurement.

The instrument works on the principle of transmission of ultrasonic waves in air. A pulse is transmitted from the sensor face into the tank. This pulse travels through the air, gets reflected by the liquid surface and returns back to the sensor. The on board electronics measures this total travel time of the pulse and the liquid level is computed.

## 2 Wire Loop Powered

Low Power Consumption and Simplified Cabling

## Narrow Beam Angle of only 5 deg

Suitable for Narrow tanks

## Built-in Temperature Compensation

Time of flight correction and greater accuracy over the entire range

## Level, Volume and Flow Measurement

Single instrument to meet diverse applications

## Optional Integrated Display

Displays the level in user selectable units and provides bar graph indication.

## 32 bit linearization function


Allows volume and flow measurement in non-standard devices

## NIVOSON MLU 860



### Technical Specifications

Power Supply	: 18-36Vdc
Outputs	: 4-20 mA (2 wire loop powered)
Display	: Backlit LCD (optional)
Measuring Range	: 6, 10 and 15 mtrs
Blanking Distance	: 0.25m, 0.35m, 0.45m
Process Connection	: Thread or Flanged
Transducer Material	: PP and PVDF
Beam Angle	: 5 deg.
Accuracy	: 0.1 5% of measured distance + 0.08% of range
Process Temperature	: - 30 deg C to +90 deg C
Process Pressure	: 3 bar Maximum
Housing	: Cast Aluminum
Protection	: IP68 for Sensor IP67 for Electronics

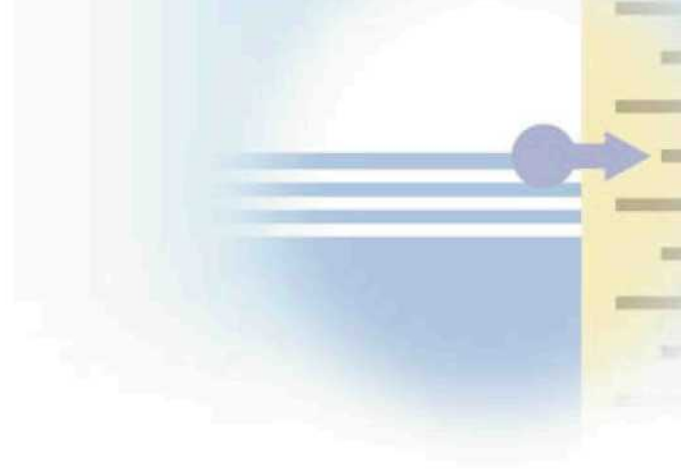


## Parameters

The NIVOSON can be used for the measurement of wide range of Parameters such as

- **Distance Measurement**
- **Level Measurement**
  - In closed tanks and open containers.
  - In applications where the sound velocity is not known, the 32 bit linearization function can be used for accurate level measurement.
- **Volume measurement**
  - With a database of 10 Pre-programmed Tank shapes, the instrument can be used to calculate the volume of the liquid in the tank.
  - The 32 bit linearization function gives the instrument the flexibility to calculate the volume in all tank shapes.
- **Flow Measurement**
  - Suitable for open channel flow measurement with calculations based on 20 pre-programmed flume and weir formulas
    - Parshall Flume
    - Venturi Flume
    - Weirs
    - 32 bit linearisation for any flume with unknown level and flow relation
  - The instrument offers 2 Flow totalizers for volumetric flow measurement. One of the totalizers is resettable while the other is not.

## Salient Features


- Self Diagnostics
- Service and Test Parameters
- Password Protection
- Temperature Monitoring
- Fixed Target Suppression

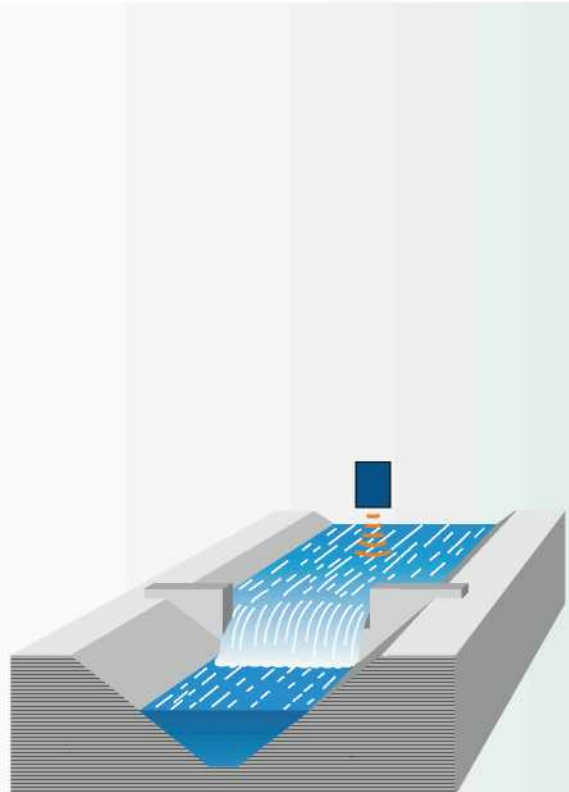

Nivo Ultrasonic Level Transmitter provides trouble free sensing of

- Raw Water
- Heavy Water
- Chilled Water
- Effluent
- Sewage
- Oil
- Sugar Syrup
- Beverages
- Juices
- Acids
- Alkalies

And many more!

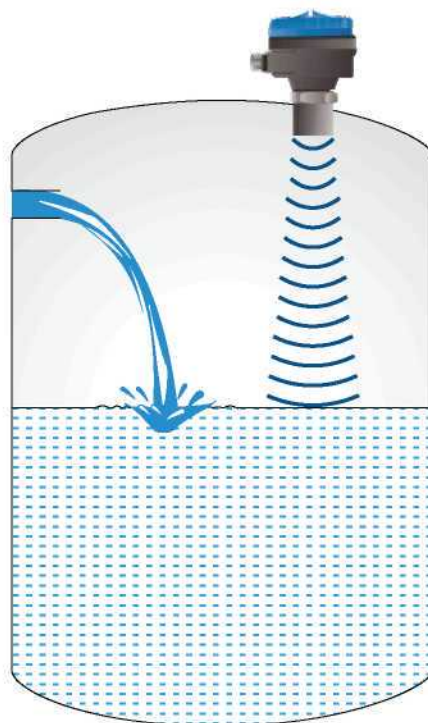

*We reserve the right to modify the technical data without prior notice.*

**Manufactured by**

**Nivo Controls Private Limited**

104-11 5, Electronic Complex, Indore 452 010. India.

Phone : + 91 731 4081305

Fax : + 91 731 2550075

E-mail : [info@nivocontrols.com](mailto:info@nivocontrols.com)

URL : [www.nivocontrols.com](http://www.nivocontrols.com)

**Marketed & Supported By**

**Toshbro Controls Private Limited**

F-68, Solaris-I, Saki Vihar Road, Powai, Mumbai 400072.

E-mail : [info@toshbrocontrols.com](mailto:info@toshbrocontrols.com)

Website : [www.toshbrocontrols.com](http://www.toshbrocontrols.com)

Tel : +91 22 2847 0728

Ahmedabad. Bangalore. Chennai. Hyderabad. Indore

Kolkata. New Delhi. Pune. Vadodara

