

BACTRACK™

BREATHALYZER

TRACKS BLOOD ALCOHOL CONTENT
IN SECONDS



Introducing the BACTRACK Breathalyzer
With advanced BluFire® Technology and an innovative, user-friendly design, the BACTRACK breathalyzer is a new generation

PROFESSIONAL ACCURACY

EASY TO USE

ATTRACTIVE DESIGN

Gas Detection - The most reliable way



With advanced BlueFire™ Technology and an innovative, user-friendly design, the BACTRACK breathalyzer is a new generation of alcohol tester.

SLEEK


Compact size and sleek design-easily fits into a pocket or purse.

SIMPLE

Simply turn on the unit and begin testing your alcohol level in a matter of seconds.

ACCURATE

BluFire Sensor Technology was developed over 5 years and provides professional accuracy.

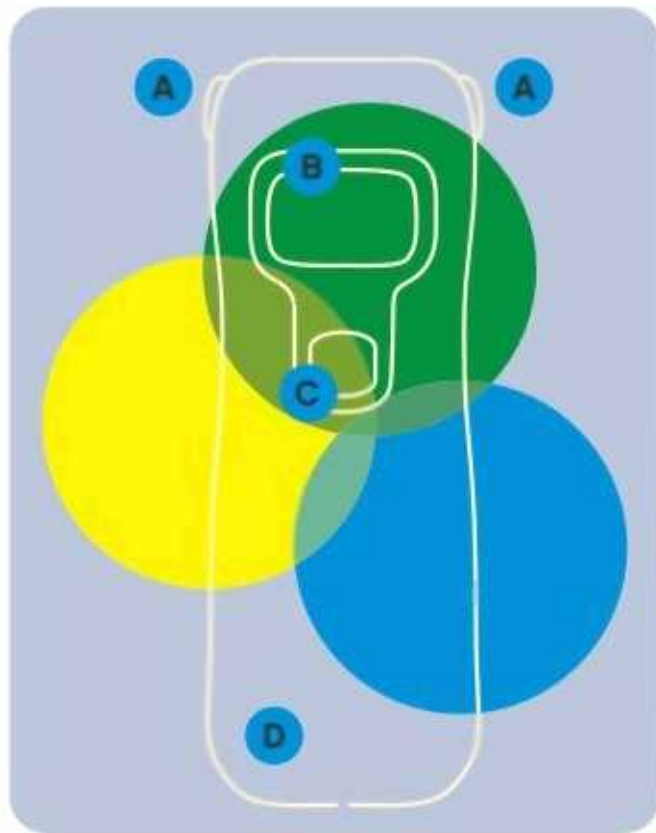

- A** Circular Light Rings provide a visual target and notify the user when to start and stop blowing.

Internal Dual Flow Tube allows subjects to blow from a half inch away with no mouthpiece required. No more sharing contaminated tubes with multiple users or paying for replacement mouthpieces.

Patent Pending BluFire Sensor Technology provides extremely accurate test results by steadying airflow and requiring a deep lung air sample for each test.

- B** Wide Test Range - Measures Blood Alcohol Content from 0.00-0.40%BAC

Inverse LCD Display - White digits on a black background make test results easy to view in daylight and at night

Recessed display helps prevent scratching.

On-screen instructions guide users when to wait and when to blow.

- C** One Button Operation - Simply turn it on and begin testing in seconds

Tap-Proof Power Button - Prevents the BACTRACK from accidentally turning on.

Hold power for five seconds to display the total number of tests performed.

- D** Compact size and sleek design - easily fits into a pocket or purse.

Choose from two colors: polished black or polished white, both with a gloss finish and silver metallic bezel.

PRODUCT SPECIFICATIONS

Dimensions	4.25 x 1.63 x 0.81 inches (10.8 x 4.1 x 2.1 cm)
Weight	1.4 oz (39.7 grams)
Sensor Technology	BluFire™
Detection Range	0.00 - 0.40 %BAC
Test Count	Displays total number of tests performed
Power Supply	Two AA batteries, not included
Battery Life	At least 300 tests
Warm Up Time	10 seconds
Response Time	3 seconds
Sensor Accuracy	+/- 0.01 %BAC @ 0.02 %BAC
Operating Temperature ...	50-104 °F (10-40 °C)



For More Information Visit

www.lpgsafety.com



PRISM

Prism Gas Detection Pvt Ltd

213, Oshiwara Industrial Centre, New Link Road, Goregaon (W), Mumbai-400 104.
Tel: 91-22-23761387/28778974 Fax: 91-22-28766116 Email: prism@lpgsafety.com
Delhi off.: 91-11-45578389 Fax: 91-11-25255403 An ISO 9001 Company