

PLUGS

These plugs act as floating male connectors and can be mated with either female connectors or female socket outlets. Connectwell Plugs offer a wide internal space for terminating wires into contacts. The male plug housing is provided with a cable gland to sustain the IP protection grade after insertion of cable.




Current Rating 16 Amp	No. of Pins	3 PIN		4 PIN		5 PIN	
	Ingress Protection	IP 44	IP 67	IP 44	IP 67	IP 44	IP 67
	Voltage (V)	230	230	400	400	400	400
	Position of ⊕	6h	6h	6h	6h	6h	6h
	Weight (gms.)	130	160	150	170	160	190
	Cat. No.	CP3164	CP3166	CP4164	CP4166	CP5164	CP5166

Current Rating 32 Amp	No. of Pins	3 PIN		4 PIN		5 PIN	
	Ingress Protection	IP 44	IP 67	IP 44	IP 67	IP 44	IP 67
	Voltage (V)	230	230	400	400	400	400
	Position of ⊕	6h	6h	6h	6h	6h	6h
	Weight (gms.)	170	200	180	220	220	260
	Cat. No.	CP3324	CP3326	CP4324	CP4326	CP5324	CP5326


Current Rating 63 Amp	No. of Pins	3 PIN		4 PIN		5 PIN	
	Ingress Protection	IP 44	IP 67	IP 44	IP 67	IP 44	IP 67
	Voltage (V)	230	230	400	400	400	400
	Position of ⊕	6h	6h	6h	6h	6h	6h
	Weight (gms.)	500	550	550	600	600	650
	Cat. No.	CP3634	CP3636	CP4634	CP4636	CP5634	CP5636

Current Rating 125 Amp	No. of Pins	4 PIN		5 PIN	
	Ingress Protection	IP 67		IP 67	
	Voltage (V)	400		400	
	Position of ⊕	6h		6h	
	Weight (gms.)	750		800	
	Cat. No.	CP41256		CP51256	

Product Drawing For 16 A & 32 A




IP44



IP67

Current, IP Grade	Cat. No.	Pin	a	b	c	d
16 A, IP 44	CP3164	3	131	94	8-24	50
	CP4164	4	137	100	8-24	50
	CP5164	5	140	103	8-24	50
16 A, IP 67	CP3166	3	131	72	8-24	50
	CP4166	4	137	80	8-24	50
	CP5166	5	140	89	8-24	50
32 A, IP 44	CP3324	3	149	103	8-24	50
	CP4324	4	149	103	8-24	50
	CP5324	5	156	110	8-24	50
32 A, IP 67	CP3326	3	149	94	8-24	50
	CP4326	4	149	94	8-24	50
	CP5326	5	156	102	8-24	50

Product Drawing For 63 A & 125 A

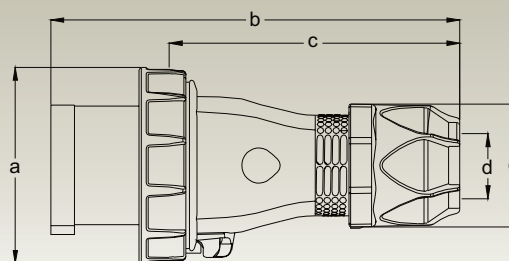

IP44 & IP67

Amps, IP Grade	Cat. No.	Pin	a	b	c	d	e
63 A, IP 44	CP3634	3	96	242	172	14.5-36	64
	CP4634	4	96	242	172	14.5-36	64
	CP5634	5	96	242	172	14.5-36	64
63 A, IP 67	CP3636	3	115	242	172	14.5-36	64
	CP4636	4	115	242	172	14.5-36	64
	CP5636	5	115	242	172	14.5-36	64
125 A, IP 67	CP41256	4	131	270	196	22.5-50	83
	CP51256	5	131	270	196	22.5-50	83