

Electrical contact devices

For pressure and temperature gauges

Integrated in housing
For dial size 100 and 160 mm

Features

- Intrinsically safe with inductive contacts
- Inductive and magnetic spring contacts
- Up to 3 contacts
- Switch rating up to 1 A 250 VAC
- For dry or liquid filled gauges



Applications

Measuring type	Pressure				Diff. pressure	Temperature
Measuring principle	Bourdon tube		Diaphragm		Diaphragm	Gas actuated
Instruments	T5500		P5500		F5503/F5509	S5500
Minimum range in	bar		mbar		mbar	°C
For dial size in mm	100	160	100	160	100/160	100/160
and 1 inductive contact	1,0	1,0	40	40	60	All ranges are possible
2 inductive contacts	1,6	1,6	100	100	100	
3 inductive contacts	1,6	1,6	100	250	100	
or 1 magnetic spring contact	1,0	1,0	40	40	100	
2 magnetic spring contacts	1,6	1,6	100	100	100	
3 magnetic spring contacts	4,0	2,5	250	250	100	

Technical specification	Magnetic spring contact		Inductive contact
Max. numbers of contacts	3		2
Switch functions	1 closes at increasing process 2 opens at increasing process 3 change over (SPDT) (max. 2 contacts)		1 initiator damped at increasing process (relay energizes) 2 initiator free at increasing process (relay de-energized)
Contact assignment	Contact 1 left hand setpoint, Contact 2 right hand setpoint with 2 contacts and middle setpoint with 3 contacts, Contact 3 right setpoint with 3 contacts		
Adjustable range			
Deadband (hysteresis)	±2 to 4 % F.S.		
Electrical specification			
			Only to be used in conjunction with an suitable and/or approved amplifier relay
Design	Max. 1 A 250 VAC (see switching capacity graph) Max. 0,6 A Max. 30 W/50 VA (see switching capacity graph)		DIN 19 234 (NAMUR) 8 VDC
Making and braking current			
Nominal current			
Load			
Current consumption			Initiator damped ≤ 1 mA, free ≥ 3 mA
Self inductance			29 µH
Self capacitance			20 nF
Insulation voltage			500 V
Explosion proof (ATEX)			II 2 G c IIC T6 EEx ia IIC T6 only for zone 1 and zone 2 (only for T5500)
Electrical connection			
Location	Left sided, others on request		
Material	Polyamide 6		
Number of terminals	6 + PE		
Max. wire size	2,5 mm ²		
Cable connection	M20x1,5		
Protection according EN 60 529/IEC 529	IP65		
Material contacts	Silver palladium (AgPd 80/20), min. 24 VDC Optional Sinidur gold plated, max. 12 VDC		Not applicable
Accuracy	Rated accuracy of gauge doesn't exceed 150 % of gauges without contacts in according to DIN 16 085		
General specification			
Permissible			
Ambient temperature	-20 ... 70 °C		
Storage temperature	-40 ... 70 °C		
Filling liquids	Napvis (for T5500, F5503 and F5509), silicone (for S5500 and P5500), others on request (only if gauge is liquid filled design)		
Mounting	Integral in gauge housing		
Additional weight dry/filled in kg	100 mm: 0,3/1,0; 160 mm: 0,4/1,5		
Accessories, options	Amplifier relay for inductive contacts EEx and standard		


All specifications are subject to change without notice.

Order information

Magnetic spring contacts		
Contact code	Switch function at increasing process	Typical diagram (at zero position)
Single contact		
M1000	Contact closes	
M2000	Contact opens	
Dual contact		
M1100	Contact 1 closes Contact 2 closes	
M2200	Contact 1 opens Contact 2 opens	
M1200	Contact 1 closes Contact 2 opens	
M2100	Contact 1 opens Contact 2 closes	
Triple contacts		
M1110	Contact 1 closes Contact 2 closes Contact 3 closes	
M2220	Contact 1 opens Contact 2 opens Contact 3 opens	
M1220	Contact 1 closes Contact 2 opens Contact 3 opens	
M2110	Contact 1 opens Contact 2 closes Contact 3 closes	
M1210	Contact 1 closes Contact 2 opens Contact 3 closes	
M2120	Contact 1 opens Contact 2 closes Contact 3 opens	
M1120	Contact 1 closes Contact 2 closes Contact 3 opens	
M2210	Contact 1 opens Contact 2 opens Contact 3 closes	

Inductive contacts			
Contact code	Switch function at increasing process	Equivalent circuit diagram (at zero position)	Position of control vane (at zero position)
Single contact			
I1000 (standard)	Current flows		
I1000SN (safety design)			
I2000 (standard)	No current flows		
I2000SN (safety design)			
Dual contact			
I1100 (standard)	Contact 1 current flows Contact 2 current flows		 1.  2.
I1100SN (safety design)			
I2200 (standard)	Contact 1 no current flows Contact 2 no current flows		 1.  2.
I2200SN (safety design)			
I1200 (standard)	Contact 1 current flows Contact 2 no current flows		 1.  2.
I1200SN (safety design)			
I2100 (standard)	Contact 1 no current flows Contact 2 current flows		 1.  2.
I2100SN (safety design)			

Switching capacity graphs for contact devices

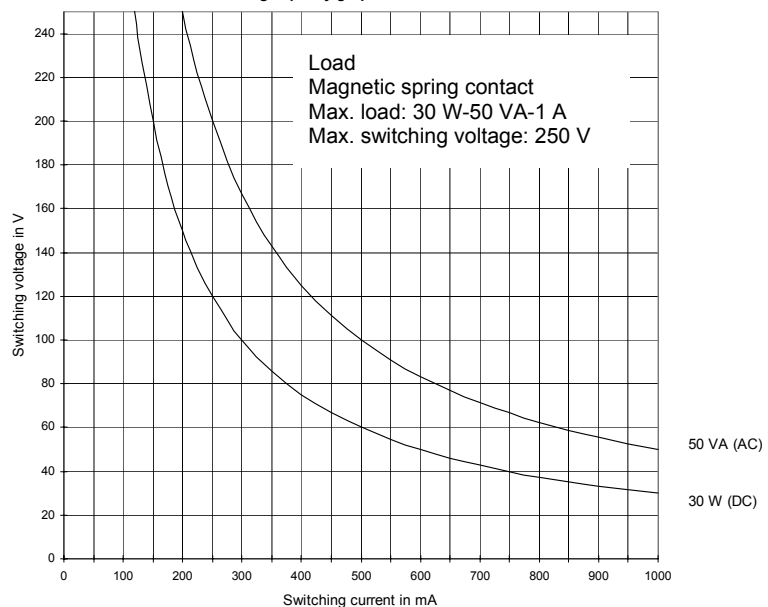

Microswitch SPDT (max. rating 3A 250 VAC/400 mA 30 VDC), for case Ø100/160			
Contact code	Pressure (diaphragm gauge)	Differential pressure	Temperature
	P5500	F5502	S5500
Q3 (1 microswitch)	min. 0/1,6 bar (no case filling)	all ranges (case filling only NAPVIS)	all ranges ((no case filling))
Q33 (2 microswitch)			

Consult factory for other contact types and number of contacts, such as two independent contacts, pneumatic, slide wire and others.

Order example

Contact type

M1200

Add contact code to the selected gauge coding.

Powertech Industries

240, Nagdevi Street, 1st Floor, Mumbai- 400003, Maharashtra, India.

Telephone: +91- 22- 32415107 / 32919706

Fax: +91- 22- 23420593

Email: pressureflow@vsnl.net / hemal@powertechin.com

website: www.powertech.in